

**FEXXO**<sup>TM</sup>  
CHEMICAL




## Company Profile

FEXXO Chemical is your one stop solution for everything related to Construction Chemicals, Epoxy, Adhesives, Admixtures, Sealers and other various application like grouting, fixing tile, waterproofing, At Fexxo, we have implemented world class practices that ensure our products lasts long.

Bid good bye to all your worries with regards to chemicals. Say hello to a worry free future, say hello to Fexxo.

BONDING WITH **FEXXO**



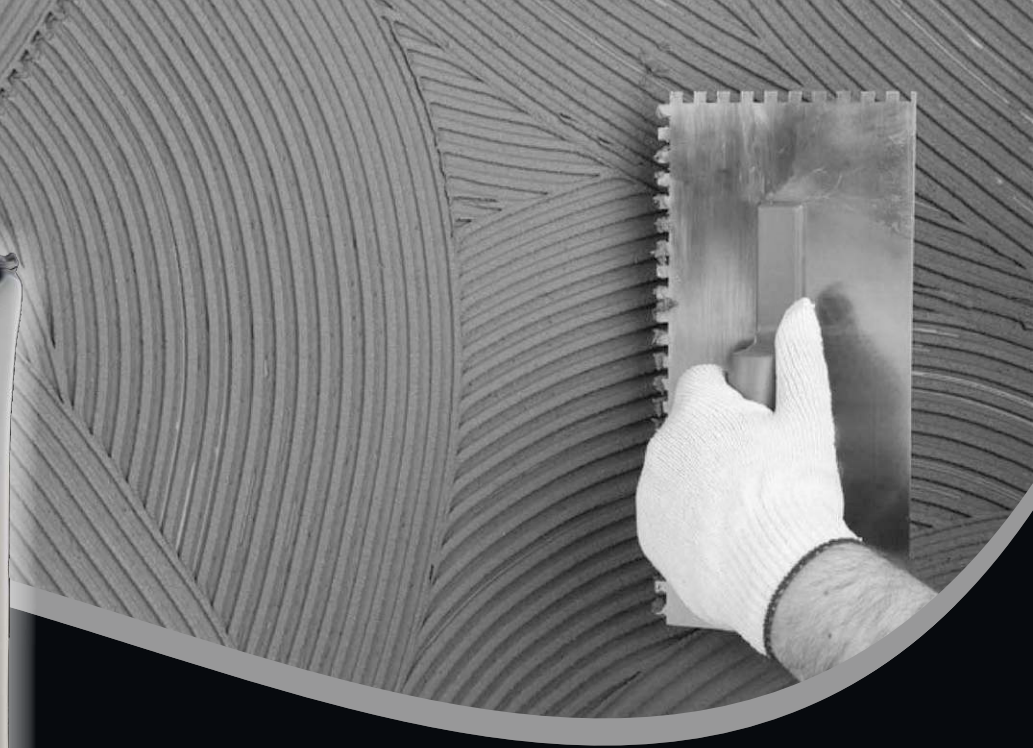

## FX-100 - TILE ADHESIVE

### PRODUCTION DETAILS

Fexxo FX-100 is a grey, high polymer modified, cement-based tile adhesive which is suitable for fixing tile, natural stones, vitrified tile in interior and exterior situations. Consult Fexxo regarding use of higher performance adhesive for applications in difficult and demanding situations.

### SHELF LIFE & STORAGE

Shelf life is 12 month from the date of manufacturing in unopened condition. Store in a cool & dry place.

### COVERAGE

This will depend on the nature and lateness of the surface and the method of application but at 3mm thickness it is approx. 55-60 sq. ft. per 20kg bag when using a thin-bed trowel. For good coverage, it is important that all surfaces should be clean, smooth, plumb. level and free from defects & undulations.

### SUITABLE FOR

- Ceramic Tiles on Internal Floor & Wall
- Vitrified tiles on floor
- Highly porous tiles

**Packing Size : 20 Kg.**





## FX-200 - TILE ADHESIVE

### PRODUCTION DETAILS

Fexxo FX-200 is a grey, high polymer modified, cement-based tile adhesive which is suitable for fixing tile, natural stones, vitrified tile in interior and exterior situations. Consult Fexxo regarding use of higher performance adhesive for applications in difficult and demanding situations.

### SHELF LIFE & STORAGE

Shelf life is 12 month from the date of manufacturing in unopened condition. Store in a cool & dry place.

### COVERAGE

This will depend on the nature and lateness of the surface and the method of application but at 3mm thickness it is approx. 55-60 sq. ft. per 20kg bag when using a thin-bed trowel. For good coverage, it is important that all surfaces should be clean, smooth, plumb. level and free from defects & undulations.

### SUITABLE FOR

- Ceramic Tiles & Vitrified Tiles on Internal Floor & Wall
- Tile on Tile Application

**Packing Size : 20 Kg.**



## FX-300 - TILE ADHESIVE

### PRODUCTION DETAILS

Fexxo FX-300 is a grey, high polymer modified, cement-based tile adhesive which is suitable for fixing tile, natural stones, vitrified tile in interior and exterior situations. Consult Fexxo regarding use of higher performance adhesive for applications in difficult and demanding situations.

### SHELF LIFE & STORAGE

Shelf life is 12 month from the date of manufacturing in unopened condition. Store in a cool & dry place.

### COVERAGE

This will depend on the nature and lateness of the surface and the method of application but at 3mm thickness it is approx. 55-60 sq. ft. per 20kg bag when using a thin-bed trowel. For good coverage, it is important that all surfaces should be clean, smooth, plumb. level and free from defects & undulations.

### SUITABLE FOR

- Ceramic Slab an internal & External application
- Ceramic Tiles & Vitrified Tiles on external application
- Granite, Marble and all type of stones

**Packing Size : 20 Kg.**



## FX-500 WHITE TILE ADHESIVE

### PRODUCTION DETAILS

Fexxo FX-500 is a grey, high polymer modified, cement-based tile adhesive which is suitable for fixing tile, natural stones, vitrified tile in interior and exterior situations. Consult Fexxo regarding use of higher performance adhesive for applications in difficult and demanding situations.

### SHELF LIFE & STORAGE

Shelf life is 12 month from the date of manufacturing in unopened condition. Store in a cool & dry place.

### COVERAGE

This will depend on the nature and lateness of the surface and the method of application but at 3mm thickness it is approx. 55-60 sq. ft. per 20kg bag when using a thin-bed trowel. For good coverage, it is important that all surfaces should be clean, smooth, plumb. level and free from defects & undulations.

### SUITABLE FOR

- Ceramic Slab an internal & External application
- Ceramic Tiles & Vitrified Tiles on external application
- Granite, Marble and all type of stones

**Packing Size : 20 Kg.**





## BLOCK JOINT

### PRODUCTION DETAILS

Digibond Block jointing mortar is a factory prepared blend of carefully selected raw materials, Portland cement, graded aggregates and polymers. Designed for use with water to produce high strength thixotropic mortar ideal for laying aerated light weight concrete, fly ash bricks, cement hollow blocks, cellular concrete blocks or smoothing over the block work surface in layers of up to 12mm thickness that meet and exceed the requirements of National and International Standards.

### FEATURES & BENEFITS

Improved bond strength, No curing required after block work is done, Flexible, shock & impact resistant optimum compressive & splitting tensile strength, easy to use, long working time, Fast & economical, Stronger adhesion, Consistent quality, Superior / advanced technology, Longer Pol Life, Reduces wastage.

### SHELF LIFE & STORAGE

Shelf life is 12 month from the date of manufacturing in unopened condition. Store in a cool & dry place.

### SUITABLE FOR

For interior and exterior use for construction with thin bed mortar for AAC, ALC and cellular concrete blocks.

### COVERAGE

Approximately 100-130 sq.ft. per 40 kg. bag.

**Packing Size : 40 Kg.**



# EPOXY GROUT

## PRODUCT DETAILS

Fexo Epoxy Joint Filler Grout is a hygienic, hard-wearing, impervious, epoxide resin-based grout with a high degree of resistance to chemical attack, abrasion and impact. The cured grout does not transfer taints to foodstuffs and does not permit the entry of bacteria or dirt. It is easily maintained in a sterile condition.

## APPLICATION OF EPOXY GROUT

- | Kitchen
- | Bathroom
- | Water Bodies
- | Swimming Pool
- | Hospitals
- | Restaurant
- | Heavy Traffic Areas

### ● HOW TO PREPARE PART-A HARDENER & PART-B RESIN :



Combine parts "A" and "B" in a clean container stir well until completely mixed. Clean

### ● PART-C FILLER POWDER :



Add part "C" Filler Powder and stir to smooth consistency. do note use in water

### THIS PACK CONTAINS

Pack Size	Resin	Hardener	Filler
5 Kg.	1000 gm.	500 gm.	3500 gm.
1 Kg.	200 gm.	100 gm.	700 gm.

### STORE IN DRY PLACE

EPOXY TILE GROUT COVERAGE CHART							
Tile Size x Thickness	Joint Width						
	3 mm	4 mm	5 mm	6 mm	8 mm	10 mm	12 mm
In mm							
100 x 100 x 3	53	35	27	18	14	11	09
150 x 150 x 4	60	40	30	50	15	12	10
200 x 150 x 5	54	36	27	18	14	11	09
150 x 300 x 6	53	35	26	18	13	10	08
300 x 300 x 6	79	53	40	26	20	16	13
450 x 300 x 7	81	54	41	27	21	16	14
600 x 600 x 8	118	79	59	39	30	24	20
600 x 900 x 10	102	68	51	34	25	20	11
900 x 900 x 12	118	79	59	39	30	24	20

Approx sq. ft. Coverage Per 1 K.g.



# EPOXY GROUT (SHADE CARD)



101 WHITE



113 MID BLUE



121 COFFEE BROWN




102 IVORY



114 BURGUNDY



122 RED BROWN



103 STEEL GREY



115 MAGENTA



123 BLACK



105 DARK GREY



116 RED



124 TERRA COTTA



108 BROWN



117 CHOCOLATE BROWN



125 BEIGE



109 ALPINE BLUE



118 WOOD BROWN



126 MID ORANGE



111 GOLDEN YELLOW



120 DARK BLUE



127 DARK BROWN


## ALL SPARKLE SERIES ARE AVAILABLE IN ALL COLOR



SILVER SERIES



GOLDEN SERIES

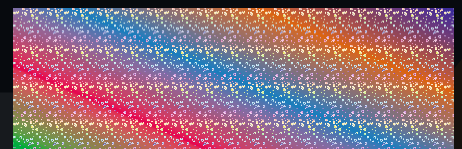

RAINBOW SERIES

\* Above color are for indication purpose, variation may occur



## TILE GROUT

### PRODUCT DETAILS

Fexxo Tile Grout is a high quality fine, polymer modified, water resistant, cement based powder grout designed for grouting glaze wall tiles, mosaics, vitrified & fully vitrified tiles, floor tiles, industrial floor tiles, etc. (Note : where chemical resistance is hygienic and sterile, it is important use Epoxy Grout)

### SHELF LIFE & STORAGE

Shelf life is 24 month from the date of manufacturing in unopened condition. Store in a cool & dry place.

### PACKING SIZE

1 kg. & 500 gm.

### COLORS



IVORY



PINK



WHITE



TERA COTA



BLACK



GREY



A. BLUE



BROWN



GREEN



## TILE CLEANER

### PRODUCT DETAILS

A Powerful heavy duty, acid - based cleaner for ceramic tiles floors and walls. The cleaner can be easily applied to both horizontal and vertical surface. Where it main contact with the area to be cleaned. Heavy duty tile cleaner is design for removal of cement film residues, efflorescence and lime scale. It may be used as general purpose cleaner on other acid resistance surface.

### NOTE

Do not use on surface that are not resistant to acid such as marble / terrazo.  
Do not use your bear hand, use hand gloves whiles using of tiles care.  
Highly reactive to skin.

### PACKING SIZE

500ml & 1 Ltr.





## GROUT ADMIX

### PRODUCT DETAILS

Grout Admix is a white polymeric emulsion helps to enhance the strength, performance and flexibility of cementitious tile grout. This is ideal for filling wide joints under wet and dry condition on walls and floors.

### FEATURE & BENEFITS

Make the cement grouts :

- Weather resistance
- Colour Fast
- Easy application and clean up
- Easy maintenance
- Non-cracking & Non-shrink
- Water resistant
- Improve flexibility and durability of grout

### APPLICATION

Used in place of water Fexo Grout Admix improves the performance of the cement grout.

### PACKING SIZE

100 ml. & 400 ml.



## SBR LATEX

### PRODUCT DETAILS

Fexxo SBR is a high-performance synthetic styrene-butadiene rubber (SBR) based water based multipurpose polymer for waterproofing, concrete repairs and can also be used as a bond-coat for bonding of new concrete to old concrete. When added to plasters it improves workability of concrete and making the surface impermeable to liquids.

### FEATURE & BENEFITS


- Multipurpose – It is multipurpose & economical product, easy to use
- Cracking – It prevents cracking by improving flexural strength } Hardness – Improves the hardness & prevents dust generation
- Shrinkage – Reduces drying & ageing shrinkage cracks
- Bonding – Bonds strongly to concrete, masonry, stone work, plasters, steel & most of the building materials.
- Erosion & corrosion – Improves erosion resistance & prevents corrosion.
- Abrasion resistance – Improves abrasion resistance of cement mix.
- Waterproofing - Prevents leakage & dampness.
- Durability - Enhances the strength of a repair mortar & provides durability.
- Rebound loss - Less material wastage- material does not fall back/ rebound, when used as bonding agent.
- Coverage - Excellent Coverage -70-80 sq.ft per kg/ in 2 coats, hence economical.

### COVERAGE

1 kg. of Fexxo SBR Latex will cover 70-80 sq.ft. are in 2 coats for a proportion mix 1:4:7  
(Fexxo SBR Latex : Water : Cement)


**Packing Size : 1 Ltr. & 5 Ltr.**

• **TILE SPACER :**

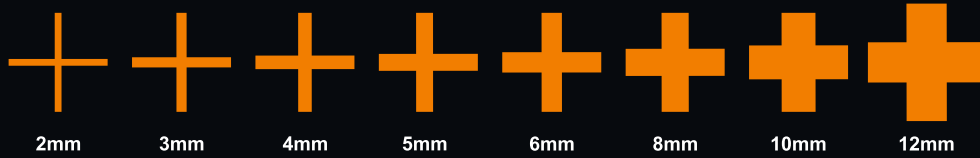

Size	2mm	3mm	4mm	5mm	6mm	8mm	10mm	12mm
Pieces/1 Packet	100	100	100	100	100	100	100	100
Packet/1 Cartoon	200	200	200	200	100	50	50	50

• **TILE LEVING KIT :**

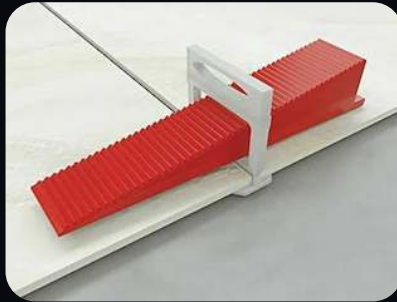

• **LEVLING JACK :**



• **TROWEL**





# FEXXO<sup>TM</sup>

CHEMICAL





**FEXXO CHEMICAL**

📍 Servey No 53/1, Plot No 3, Pipli Road, Morbi - 363 642 (Guj.)

✉ [fexxochemical@gmail.com](mailto:fexxochemical@gmail.com)